




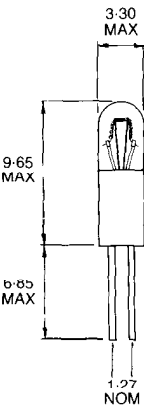


SUB-MINIATURE LAMPS

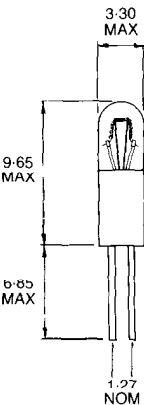

T-1 SHORT	3mm	Lamp Number	Volts	Amps	Lumens	MSCP	Life (hours)	Filament Shape
Wire Terminal 	CM6832	5.0	0.06	0.63	0.05	20,000	C-2R	
	CM6152	5.0	0.06	1.90	0.15	5,000	C-2R	
	CM7152	5.0	0.115	1.90	0.15	20,000	C-2R	
								
FIG. 3								
T-1	3mm	Lamp Number	Volts	Amps	Lumens	MSCP	Life (hours)	Filament Shape
Wire Terminal 	CM8602	5.0	0.017 ±20%	0.06	0.005	10,000	C-2R	
	CM6022	5.0	0.021 ±20%	0.43	0.034	3,000	C-2R	
	CM7210	5.0	0.03	0.38	0.03	5,000	C-2R	
	CM680	5.0	0.06	0.38	0.03	40,000	C-2R	
	CM683	5.0	0.06	0.63	0.05	20,000	C-2R	
	CM713	5.0	0.075	1.13	0.09	10,000	C-2R	
	CM715	5.0	0.115	1.90	0.15	20,000	C-2R	
	CM7219	12.0	0.06	1.90	0.15	10,000	C-2F	
	CM8111	14.0	0.065	1.90	0.15	10,000	C-2F	
	CM7220	18.0	0.026	1.90	0.15	5,000	C-2F	
	CM6838	28.0	0.024	1.90	0.15	4,000	CC-2F	
								
	FIG. 4							
T-1	3mm	Lamp Number	Volts	Amps	Lumens	MSCP	Life (hours)	Filament Shape
Bi-Pin 	CM7263	5.0	0.03	0.38	0.03	5,000	C-2R	
	CM7680	5.0	0.06	0.38	0.03	40,000	C-2R	
	CM7683	5.0	0.06	0.63	0.05	20,000	C-2R	
	CM7714	5.0	0.075	1.13	0.09	10,000	C-2R	
	CM7715	5.0	0.115	1.90	0.15	20,000	C-2R	
	CM8097	12.0	0.06	1.90	0.15	10,000	C-2F	
	CM8099	18.0	0.026	1.90	0.15	5,000	C-2F	
	CM7839	28.0	0.024	1.90	0.15	4,000	CC-2F	
								
	FIG. 5							