

# SUB-MINIATURE LAMPS



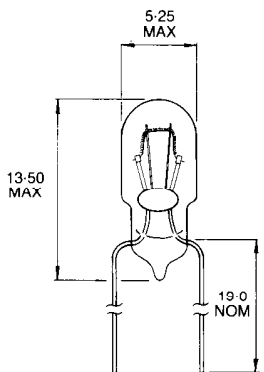
T-1½	5mm	Lamp Number	Volts	Amps	Lumens	MSCP	Life (hours)	Filament Shape
<b>Wire Terminal</b>  	655WT	1.5	0.075	0.50	0.04	30	S-2	
	697WT	6.0	0.04	0.50	0.04	10,000	C-2R	
	<b>673WT</b>	<b>6.0</b>	<b>0.055</b>	<b>1.00</b>	<b>0.08</b>	<b>10,000</b>	<b>C-2R</b>	
	674WT	6.5	0.15	4.00	0.32	2,500	C-2V	
	<b>679WT</b>	<b>12.0</b>	<b>0.083</b>	<b>2.40</b>	<b>0.19</b>	<b>10,000</b>	<b>C-2V</b>	
	280WT	12.0	0.127	5.30	0.42	5,000	C-2F	
	<b>690WT</b>	<b>14.0</b>	<b>0.037</b>	<b>1.60</b>	<b>0.13</b>	<b>5,000</b>	<b>C-2F</b>	
	<b>5682WT</b>	<b>14.0</b>	<b>0.05</b>	<b>3.00</b>	<b>0.24</b>	<b>1,000</b>	<b>C-2F</b>	
	684WT	18.0	0.04	1.90	0.15	10,000	C-2F	
	<b>687WT</b>	<b>24.0</b>	<b>0.04</b>	<b>3.00</b>	<b>0.24</b>	<b>7,000</b>	<b>C-2F</b>	
	CM399WT	28.0	0.04	3.80	0.30	7,000	C-2F	
	<b>688WT</b>	<b>28.0</b>	<b>0.04</b>	<b>4.50</b>	<b>0.36</b>	<b>4,000</b>	<b>C-2F</b>	

FIG.12

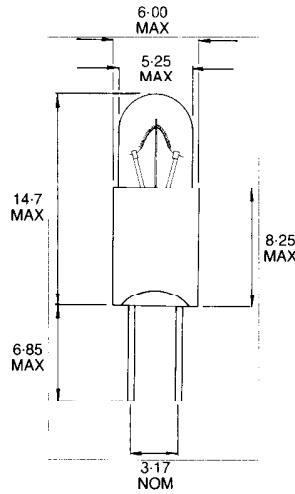
T-1½	5mm	Lamp Number	Volts	Amps	Lumens	MSCP	Life (hours)	Filament Shape
<b>Bi-Pin</b>  	<b>673BP</b>	<b>6.0</b>	<b>0.055</b>	<b>1.00</b>	<b>0.08</b>	<b>10,000</b>	<b>C-2R</b>	
	679BP	12.0	0.083	2.40	0.19	10,000	C-2V	
	690BP	14.0	0.037	1.60	0.13	5,000	C-2F	
	688BP	28.0	0.04	4.50	0.36	4,000	C-2F	

FIG.13